AF09Z ... AF38Z 3-pole contactors
4 to 18.5 kW
24 V DC operated - low consumption



AF09Z-30-10



AF26Z-30-00

5

Description

AF09Z ... AF38Z contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC and 220 V DC. These contactors are of the block type design with 3 main poles.


- control circuit: DC operated with electronic coil interface allowing low holding consumption up to 1.7 W and reduced panel energy consumption
- allow direct control by PLC-output ≥ 250 mA 24 V DC
- very distinct closing and opening
- built-in surge suppression
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories.

Ordering details


IEC		UL/CSA		Rated control circuit voltage Uc	Auxiliary contacts fitted	Type	Order code		Weight
Rated operational power 400 V AC-3 kW	current θ ≤ 40 °C AC-1 A	3-phase motor rating 480 V hp	General use rating 600 V AC A	V DC					Pkg (1 pce) kg
4	25	5	25	24	1 0	AF09Z-30-10-30	1SBL136001R3010		0.430
					0 1	AF09Z-30-01-30	1SBL136001R3001		0.430
5.5	28	7.5	28	24	1 0	AF12Z-30-10-30	1SBL156001R3010		0.430
					0 1	AF12Z-30-01-30	1SBL156001R3001		0.430
7.5	30	10	30	24	1 0	AF16Z-30-10-30	1SBL176001R3010		0.430
					0 1	AF16Z-30-01-30	1SBL176001R3001		0.430
11	45	15	45	24	0 0	AF26Z-30-00-30	1SBL236001R3000		0.480
15	50	20	50	24	0 0	AF30Z-30-00-30	1SBL276001R3000		0.480
18.5	50	25	50	24	0 0	AF38Z-30-00-30	1SBL296001R3000		0.480

AF..Z contactors with 24 V DC control voltage need to respect the connection polarities indicated close to the coil terminals: A1+ for the positive pole and A2- for the negative pole.

Main dimensions mm, *inches*

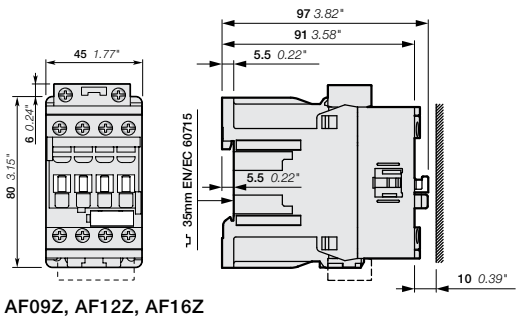

AF09Z, AF12Z, AF16Z

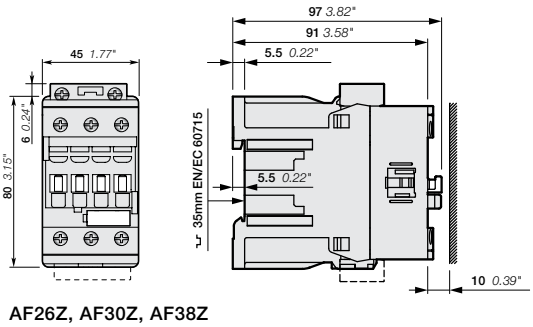


AF26Z, AF30Z, AF38Z

1SBC100328S0201

AF09 ... AF96 3-pole contactors
Main accessories

Contactor and main accessories (other accessories available)

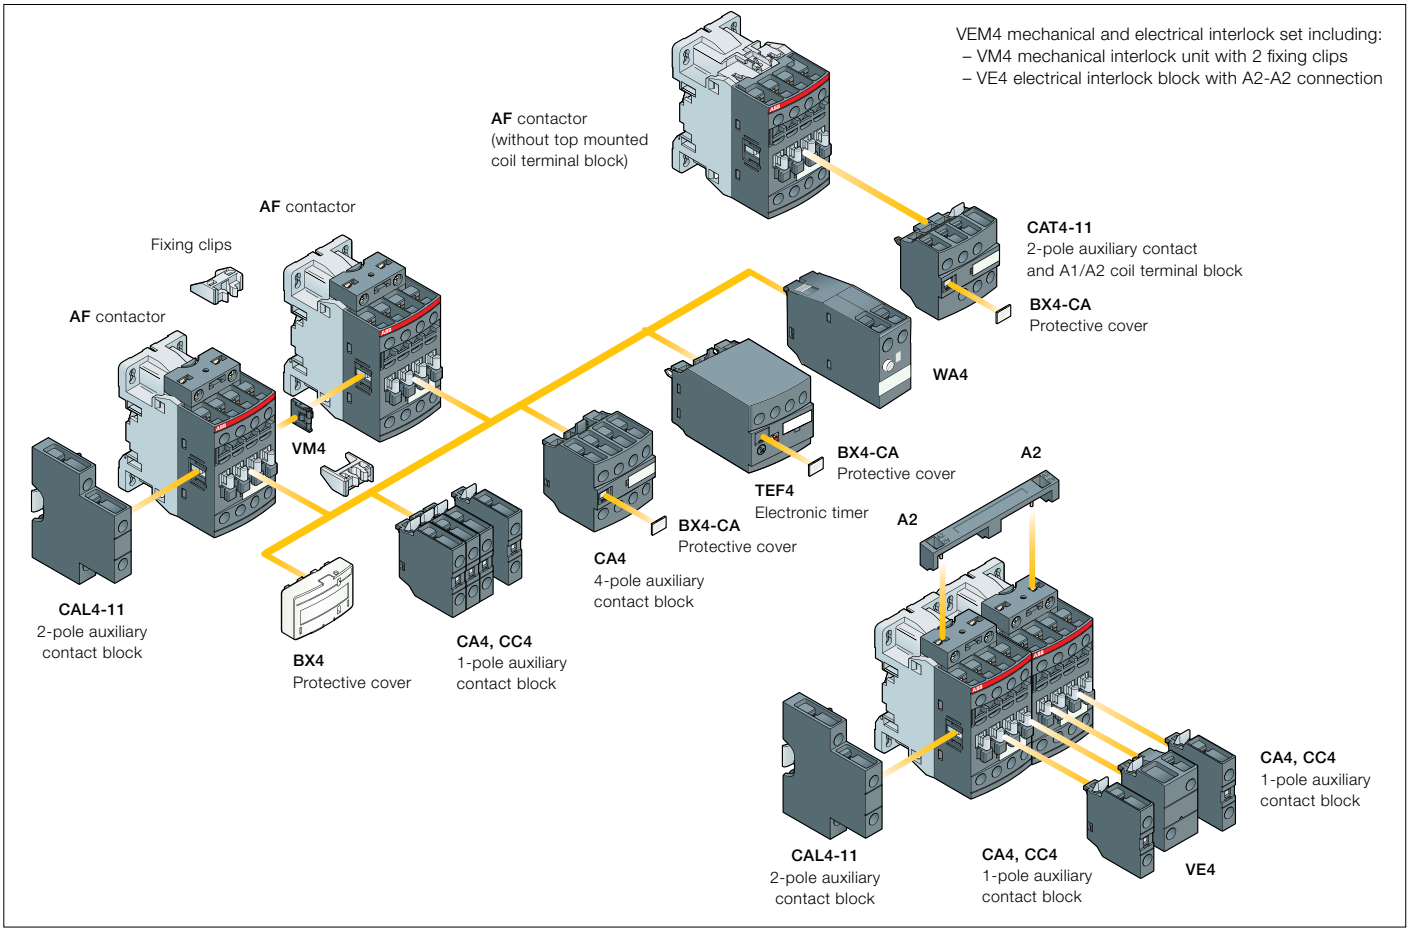

Main accessory fitting details

Many configurations of accessories are possible depending on whether these are front-mounted or side-mounted.

Contactor types	Main poles	Built-in auxiliary contacts	Front-mounted accessories												Side-mounted accessories		
			Auxiliary contact blocks						Electronic timer		Mechanical latching unit		Electrical and mechanical interlock set (between 2 contactors)		Auxiliary contact blocks		
			1-pole CA4												Left side		Right side
			1-pole CC4 (3)		2-pole CAT4-11		4-pole CA4		TEF4 (3)		WA4 (1) (3)		VEM4		2-pole CAL4-11		
	Max. N.C. built-in and add-on N.C. auxiliary contacts: 4 N.C. max. on positions 1, 2, 3, 4 and 3 N.C. max. on positions 1 ±30°, 5																
AF09 ... AF16	3 0	0 1	4 max.	or	1	or	1	or	1	or	1		–	+	1		–
AF09 ... AF16	3 0	1 0	2 max.	or	1		–	or	1	or	1		–	+	1	+	1
AF26 ... AF38	3 0	0 0	3 max.		–		–		–		–	+	1	+	1	or	1
	Max. add-on N.C. auxiliary contacts: 6 N.C. max. on positions 1, 1 ±30°, 2, 3, 4, 5																
AF40 ... AF65	3 0	0 0	4 max.	or	1	or	1	or	1	or	1		–	+	1	+	1
AF80, AF96	3 0	0 0	4 max.		–	or	1	or	1	or	1		–	+	1	+	1
AF09Z ... AF38Z 24 V DC (coil 30)	Max. N.C. built-in and add-on N.C. auxiliary contacts: 4 N.C. max. on positions 1, 2, 3, 4 and 3 N.C. max. on positions 1 ±30°, 5																
AF09Z ... AF16Z	3 0	0 1	4 max.		–	or	1		–		–		–	or	1	+	1
AF09Z ... AF16Z	3 0	1 0	2 max.		–		–		–		–		–	+	1	or	1
AF26Z ... AF38Z	3 0	0 0															

Overload relays fitting details (2)

Contactor types	Thermal overload relays	Electronic overload relays
AF09 ... AF38	TF42 (0.10...38 A)	EF19 (0.10...19 A)
AF26 ... AF38	TF42 (0.10...38 A)	EF45 (9...45 A)
AF40 ... AF65	TF65 (22...67 A)	EF65 (20...70 A)
AF80, AF96	TF96 (40...96 A)	EF96 (36...100 A)

The addition of an overload relay on the contactor does not prevent fitting of many other accessories as shown above.
(1) accept 1-pole CA4 auxiliary contacts (1 block on each side of the mechanical latch) in respect to the total number of built-in or additional N.C. auxiliary contacts
(2) Direct mounting - No kit required.
(3) For CC4, CE5, WA4, TEF4 accessory use with contactors coil 30, please consult your ABB local sales organization.

1SBC100358S0201 - Rev. C

AF09 ... AF96 3-pole contactors
Main accessories



CA4-10




CAL4-11




CA4-22E



CAT4-11E



VEM4





TEF4-ON



WA4-13

Ordering details (1)

For contactors	Auxiliary contacts				Type	Order code		Pkg qty	Weight (1 pce) kg
Front-mounted instantaneous auxiliary contact blocks									
AF09 ... AF96	1	0	–	–	CA4-10	1SBN010110R1010		1	0.014
	1	0	–	–	CA4-10-T	1SBN010110T1010		10	0.014
	0	1	–	–	CA4-01	1SBN010110R1001		1	0.014
	0	1	–	–	CA4-01-T	1SBN010110T1001		10	0.014
AF09 ... AF16..-30-10	2	2	–	–	CA4-22M	1SBN010140R1122		1	0.055
AF26 ... AF96..-30-00	2	2	–	–	CA4-22E	1SBN010140R1022		1	0.055
AF09 ... AF16..-30-01	2	2	–	–	CA4-22U	1SBN010140R1322		1	0.055
Front-mounted auxiliary contact blocks with N.O. leading contact and N.C. lagging contact (2)									
AF09 ... AF96	–	–	1	0	CC4-10	1SBN010111R1010		1	0.014
	–	–	0	1	CC4-01	1SBN010111R1001		1	0.014
Side-mounted instantaneous auxiliary contact blocks									
AF09 ... AF96	1	1	–	–	CAL4-11	1SBN010120R1011		1	0.040
	1	1	–	–	CAL4-11-T	1SBN010120T1011		10	0.040
Front-mounted instantaneous auxiliary contact and A1/A2 coil terminal blocks									
AF09 ... AF16..-30-10	1	1	–	–	CAT4-11M	1SBN010151R1111		1	0.040
AF26 ... AF65..-30-00	1	1	–	–	CAT4-11E	1SBN010151R1011		1	0.040
AF09 ... AF16..-30-01	1	1	–	–	CAT4-11U	1SBN010151R1311		1	0.040

Note: CAT4 not suitable for AF..Z contactors with DC control voltages 12...20 V DC (coil 20) and 24 V DC (coil 30).

Mechanical interlock unit

AF09 ... AF38		VM4	1SBN030105T1000		10	0.005
AF40 ... AF96		VM96-4	1SBN033405T1000		10	0.006

Note: VM4 and VM96-4 include 2 fixing clips (BB4) to maintain together both contactors.

Mechanical and electrical interlock set

AF09 ... AF16 AF26 ... AF38	0 2 – –	VEM4	1SBN030111R1000		1	0.035

Note: - VEM4 includes a VM4 mechanical interlock unit with 2 fixing clips (BB4), a VE4 electrical interlock block. VE4 block must be used with A2-A2 connection to respect the electrical connection diagram.
- VEM4 not suitable for AF..Z contactors with DC control voltages 12...20 V DC (coil 20) and 24 V DC (coil 30).

For contactors	Time delay range selected by switch	Delay type	Auxiliary contacts	Type	Order code		Pkg qty	Weight (1 pce) kg
Electronic timers (2)								
AF09 ... AF96	0.1...1 s 1...10 s 10...100 s	ON-delay	1 1	TEF4-ON	1SBN020112R1000		1	0.065
		OFF-delay	1 1	TEF4-OFF	1SBN020114R1000		1	0.065

Note: Rated control circuit voltage Uc 24...240 V 50/60 Hz or DC.

Mechanical latching unit (2)


AF09 ... AF65	WA4-13	1SBN040100R1013		1	0.080
AF80, AF96	WA4-96-13	1SBN040200R1013		1	0.080

Note: coil 13 for Uc 100...250 V 50/60 Hz or DC. For other rated control circuit voltages between 24...500 V 50/60 Hz / DC or 24 V DC - 500 mA PLC control, refer to main catalog "Accessories" section.


(1) For more information, refer to main catalog "Accessories" section.
(2) For CC4, CE5, WA4, TEF4 accessory use with contactors coil 30, please consult your ABB local sales organization.

1SBC100359S0201 - Rev. A

AF09 ... AF96 3-pole contactors
Main accessories



BEA16-4



BER16-4

Ordering details (1)

For contactors			Type	Order code		Pkg qty	Weight (1 pce) kg
Connecting links with manual motor starters							
AF09 ... AF16	with	MS116-0.16 ... MS116-25	BEA16-4	1SBN081306T1000		10	0.025
		MS132-0.16 ... MS132-25					
AF26 ... AF38	with	MS116-0.16 ... MS116-16	BEA26-4	1SBN082306T1000		10	0.025
		MS132-0.16 ... MS132-10					
	with	MS116-20 ... MS116-32,	BEA38-4	1SBN082306T2000		10	0.030
		MS132-12 ... MS132-32					
AF40 ... AF65	with	MS165-16 ... MS165-65	BEA65-4	1SBN083406R1000		1	0.090
		MS165-16 ... MS165-65 (1)	BPR65-4	1SBN113405R1000		1	0.014
Connection sets for reversing contactors							
AF09 ... AF16			BER16-4	1SBN081311R1000		1	0.045
AF26 ... AF38			BER38-4	1SBN082311R1000		1	0.100
AF40 ... AF65			BER65-4	1SBN083411R1000		1	0.175
AF80 ... AF96			BER96-4	1SBN083911R1000		1	0.250
Connection sets for star-delta starting							
AF09 ... AF16	With or without VM4		BEY16-4	1SBN081313R2000		1	0.050
AF26 ... AF38	With or without VM4		BEY38-4	1SBN082713R2000		1	0.110
AF40 ... AF65	With or without VM96-4		BEY65-4	1SBN083413R2000		1	0.200
AF80 ... AF96	With or without VM96-4		BEY96-4	1SBN083913R2000		1	0.250

Note: (1) Applicable for MS165 manufactured after week 31, 2016 (date code > 16214). Use one BPR65-4 for each contactor AF40 ... AF65.

1SBC100432S0201

AF09 ... AF38 3-pole contactors
Technical data

Main pole - Utilization characteristics according to IEC

Contactor types	AC / DC operated	AF09	AF12	AF16	AF26	AF30	AF38
Standards		IEC 60947-1 / 60947-4-1 and EN 60947-1 / 60947-4-1					
Rated operational voltage Ue max.		690 V					
Rated frequency (without derating)		50 / 60 Hz					
Conventional free-air thermal current Ith							
acc. to IEC 60947-4-1, open contactors, θ ≤ 40 °C		35 A	35 A	35 A	50 A	50 A	50 A
With conductor cross-sectional area		6 mm²	6 mm²	6 mm²	10 mm²	10 mm²	10 mm²
AC-1 Utilization category							
For air temperature close to contactor							
Ie / Rated operational current AC-1	**θ ≤ 40 °C**	25 A	28 A	30 A	45 A	50 A	50 A
Ue max. ≤ 690 V, 50/60 Hz	**θ ≤ 60 °C**	25 A	28 A	30 A	40 A	42 A	42 A
	θ ≤ 70 °C	22 A	24 A	26 A	32 A	37 A	37 A
With conductor cross-sectional area		4 mm²	6 mm²	6 mm²	10 mm²	10 mm²	10 mm²
AC-3 Utilization category							
For air temperature close to contactor θ ≤ 60 °C							
Ie / Max. rated operational current AC-3 (1)							
	220-230-240 V	9 A	12 A	18 A	26 A	33 A	40 A
	380-400 V	9 A	12 A	18 A	26 A	32 A	38 A
M 3~ 3-phase motors	**415 V**	9 A	12 A	18 A	26 A	32 A	38 A
	440 V	9 A	12 A	18 A	26 A	32 A	38 A
	500 V	9.5 A	12.5 A	15 A	23 A	28 A	33 A
	690 V	7 A	9 A	10.5 A	17 A	21 A	24 A
Rated operational power AC-3 (1)							
	220-230-240 V	2.2 kW	3 kW	4 kW	6.5 kW	9 kW	11 kW
	380-400 V	4 kW	5.5 kW	7.5 kW	11 kW	15 kW	18.5 kW
M 3~ 1500 r.p.m. 50 Hz, 1800 r.p.m. 60 Hz, 3-phase motors	**415 V**	4 kW	5.5 kW	9 kW	11 kW	15 kW	18.5 kW
	440 V	4 kW	5.5 kW	9 kW	15 kW	18.5 kW	22 kW
	500 V	5.5 kW	7.5 kW	9 kW	15 kW	18.5 kW	22 kW
	690 V	5.5 kW	7.5 kW	9 kW	15 kW	18.5 kW	22 kW
Rated making capacity AC-3		10 x Ie AC-3 acc. to IEC 60947-4-1					
Rated breaking capacity AC-3		8 x Ie AC-3 acc. to IEC 60947-4-1					
AC-8a Utilization category							
(without thermal overload relay - Ue 400 V 50/60 Hz - θ ≤ 40 °C)							
Ie / Rated operational current AC-8a		12 A	16 A	22 A	30 A	40 A	50 A
Rated operational power AC-8a		5.5 kW	7.5 kW	11 kW	15 kW	20 kW	25 kW
Short-circuit protection device for contactors							
without thermal overload relay - Motor protection excluded (2)							
Ue ≤ 500 V AC - gG type fuse		25 A	32 A	32 A	50 A	63 A	63 A
Rated short-time withstand current Icw	**1 s**	300 A	300 A	300 A	700 A	700 A	700 A
at 40 °C ambient temperature, in free air from a cold state	**10 s**	150 A	150 A	150 A	350 A	350 A	350 A
	30 s	80 A	80 A	80 A	225 A	225 A	225 A
	1 min	60 A	60 A	60 A	150 A	150 A	150 A
	15 min	35 A	35 A	35 A	50 A	50 A	50 A
Maximum breaking capacity							
cos φ = 0.45	**at 440 V**	250 A	250 A	250 A	500 A	500 A	500 A
	at 690 V	106 A	106 A	106 A	200 A	200 A	200 A
Power dissipation per pole	**Ie / AC-1**	0.8 W	1 W	1.2 W	1.8 W	2.4 W	2.4 W
	Ie / AC-3	0.1 W	0.2 W	0.35 W	0.6 W	0.9 W	1.3 W
Max. electrical switching frequency	**AC-1**	600 cycles/h					
	AC-3	1200 cycles/h					
	AC-2, AC-4	300 cycles/h			150 cycles/h		

(1) For the corresponding kW/A or hp/A values of 1500 r.p.m, 50 Hz or 1800 r.p.m, 60 Hz, 3-phase motors, see "Motor rated operational powers and currents".
(2) For the protection of motor starters against short circuits, see "Coordination with short-circuit protection devices".

1SBC101425S0201 - Rev. A

AF09 ... AF38 3-pole contactors
Technical data

Main pole - Utilization characteristics according to UL / NEMA / CSA

Contactor types	AC / DC operated	AF09	AF12	AF16	AF26	AF30	AF38
Standards		UL 508, CSA C22.2 N°60947-4-1					
Max. operational voltage		600 V					
NEMA size		00	0	–	1	–	–
NEMA continuous amp rating	Thermal current	9 A	18 A		27 A		
NEMA maximum horse power ratings							
1-phase, 60 Hz	**115 V AC**	1/3 hp	1 hp		2 hp		
	230 V AC	1 hp	2 hp		3 hp		
NEMA maximum horse power ratings							
3-phase, 60 Hz	**200 V AC**	1-1/2 hp	3 hp		7-1/2 hp		
	230 V AC	1-1/2 hp	3 hp		7-1/2 hp		
	460 V AC	2 hp	5 hp		10 hp		
	575 V AC	2 hp	5 hp		10 hp		
UL / CSA general use rating							
	600 V AC	25 A	28 A	30 A	45 A	50 A	50 A
With conductor cross-sectional area		AWG 10	AWG 10	AWG 10	AWG 8	AWG 8	AWG 8
1 pole	**80 V DC**	25 A	28 A	30 A	45 A	50 A	50 A
2 poles in serie	**160 V DC**	25 A	28 A	30 A	45 A	50 A	50 A
3 poles in serie	**240 V DC**	25 A	28 A	30 A	45 A	50 A	50 A
With conductor cross-sectional area		AWG 10	AWG 10	AWG 10	AWG 8	AWG 8	AWG 8
UL / CSA maximum 1-phase motor rating							
Full load current	**120 V AC**	13.8 A	16 A	20 A	24 A	24 A	24 A
	240 V AC	10 A	12 A	17 A	17 A	28 A	28 A
Horse power rating	**120 V AC**	3/4 hp	1 hp	1-1/2 hp	2 hp	2 hp	2 hp
	240 V AC	1-1/2 hp	2 hp	3 hp	3 hp	5 hp	5 hp
UL / CSA maximum 3-phase motor rating							
Full load current (1)	**200-208 V AC**	7.8 A	11 A	17.5 A	25.3 A	32.2 A	32.2 A
	220-240 V AC	6.8 A	9.6 A	15.2 A	22 A	28 A	28 A
	440-480 V AC	7.6 A	11 A	14 A	21 A	27 A	34 A (3)
	550-600 V AC	9 A	11 A	17 A	22 A	27 A (2)	32 A (3)
Horse power rating (1)	**200-208 V AC**	2 hp	3 hp	5 hp	7-1/2 hp	10 hp	10 hp
	220-240 V AC	2 hp	3 hp	5 hp	7-1/2 hp	10 hp	10 hp
	440-480 V AC	5 hp	7-1/2 hp	10 hp	15 hp	20 hp	25 hp (3)
	550-600 V AC	7-1/2 hp	10 hp	15 hp	20 hp	25 hp (2)	30 hp (3)
UL / CSA - DC motor starting - 3 poles in series							
Full Load Amps (FLA)	**125 V DC**	9.5 A	13.2 A	17 A	25 A	25 A	25 A
	250 V DC	8.5 A	12.2 A	12.2 A	20 A	29 A	29 A
Horse power rating	**125 V DC**	1 hp	1-1/2 hp	2 hp	3 hp	3 hp	3 hp
	250 V DC	2 hp	3 hp	3 hp	5 hp	7-1/2 hp	7-1/2 hp
Short-circuit protection device for contactors							
without thermal overload relay - Motor protection excluded							
High fault current		100 kA					
Fuse rating		30 A	30 A	60 A	60 A	100 A	100 A
Fuse type, 600 V		J					
Max. electrical switching frequency							
For general use		600 cycles/h					
For motor use		1200 cycles/h					

(1) For the corresponding kW/A or hp/A values of 1500 r.p.m, 50 Hz or 1800 r.p.m, 60 Hz, 3-phase motors, see “Motor rated operational powers and currents”.
(2) For contactors produced since week 49-2011.
(3) For contactors produced since week 36-2014.

1SBC101426S0201 - Rev. C

AF09 ... AF96 3-pole contactors
Technical data

Main pole utilization characteristics - 3 N.O. non-reversing contactors


Contactor types	AC / DC operated	AF09	AF12	AF16	AF26	AF30	AF38	AF40	AF52	AF65	AF80	AF96
HVAC application - UL / CSA												
Definite purpose heating rating - 3-phase												
Full Load Amps (FLA)		20 A	25 A	30 A	45 A	50 A	50 A	60 A	80 A	90 A	105 A	115 A
Locked Rotor Amps (LRA)	**200-208 V AC**	120 A	150 A	180 A	270 A	300 A	300 A	360 A	480 A	540 A	630 A	690 A
	220-240 V AC	120 A	150 A	180 A	270 A	300 A	300 A	360 A	480 A	540 A	630 A	690 A
	440-480 V AC	120 A	150 A	180 A	270 A	300 A	300 A	360 A	480 A	540 A	630 A	690 A
	550-600 V AC	80 A	100 A	120 A	180 A	200 A	200 A	240 A	320 A	360 A	420 A	460 A
Definite purpose air conditioning rating - 3-phase												
Full Load Amps (FLA)		20 A	25 A	30 A	45 A	50 A	50 A	60 A	80 A	90 A	105 A	115 A
Locked Rotor Amps (LRA)	**200-208 V AC**	120 A	150 A	180 A	270 A	300 A	300 A	360 A	480 A	540 A	630 A	690 A
	220-240 V AC	120 A	150 A	180 A	270 A	300 A	300 A	360 A	480 A	540 A	630 A	690 A
	440-480 V AC	120 A	150 A	180 A	270 A	300 A	300 A	360 A	480 A	540 A	630 A	690 A
	550-600 V AC	80 A	100 A	120 A	180 A	200 A	200 A	240 A	320 A	360 A	420 A	460 A
AC Resistance air heating												
Full Load Amps (FLA)	**600 V AC**	20 A	25 A	30 A	45 A	50 A	50 A	65 A	80 A	90 A	105 A	115 A
Elevator control, load switching, 500 000 electrical operating cycles acc. to CSA B44.1 / ASME 17.5 paragraph 19.2.1												
1-phase												
Horse power rating	**110-120 V AC**	1/4 hp	1/3 hp	(1)	1-1/2 hp	2 hp	2 hp	3 hp	3 hp	3 hp	5 hp	5 hp
	220-240 V AC	1/2 hp	3/4 hp	(1)	3 hp	3 hp	5 hp	5 hp	7-1/2 hp	10 hp	10 hp	10 hp
3-phase												
Horse power rating	**200-208 V AC**	1 hp	2 hp	(1)	5 hp	7-1/2 hp	7-1/2 hp	10 hp	10 hp	15 hp	15 hp	15 hp
	220-240 V AC	1 hp	2 hp	(1)	5 hp	7-1/2 hp	10 hp	10 hp	15 hp	20 hp	20 hp	20 hp
	440-480 V AC	3 hp	5 hp	(1)	15 hp	20 hp	20 hp	25 hp	30 hp	40 hp	40 hp	40 hp
	550-600 V AC	3 hp	5 hp	(1)	15 hp	20 hp	20 hp	30 hp	40 hp	40 hp	50 hp	50 hp
Elevator control, 500 000 mechanical operating cycles, 5 electrical operating cycles acc. to CSA B44.1 / ASME 17.5 paragraph 19.2.2												
1-phase												
Horse power rating	**110-120 V AC**	3/4 hp	1 hp	1-1/2 hp	2 hp	2 hp	3 hp	3 hp	3 hp	5 hp	7-1/2 hp	7-1/2 hp
	220-240 V AC	1-1/2 hp	2 hp	3 hp	3 hp	5 hp	7.5 hp	7-1/2 hp	7-1/2 hp	10 hp	15 hp	20 hp
3-phase												
Horse power rating	**200-208 V AC**	2 hp	3 hp	5 hp	7-1/2 hp	10 hp	10 hp	10 hp	15 hp	20 hp	25 hp	30 hp
	220-240 V AC	2 hp	3 hp	5 hp	7-1/2 hp	10 hp	10 hp	15 hp	20 hp	25 hp	30 hp	30 hp
	440-480 V AC	5 hp	7-1/2 hp	10 hp	15 hp	20 hp	25 hp	30 hp	40 hp	50 hp	60 hp	60 hp
	550-600 V AC	7-1/2 hp	10 hp	15 hp	20 hp	25 hp	30 hp	40 hp	50 hp	60 hp	75 hp	75 hp
Lighting application - UL / CSA												
Tungsten lamps												
1-phase per pole	**347 V AC**	20 A	25 A	30 A	45 A	50 A	50 A	65 A	80 A	90 A	105 A	115 A
3-phase break all lines	**600 V AC**	20 A	25 A	30 A	45 A	50 A	50 A	65 A	80 A	90 A	105 A	115 A
Electrical discharge lamps (ballast)												
1-phase per pole	**347 V AC**	20 A	25 A	30 A	45 A	50 A	50 A	65 A	80 A	90 A	105 A	115 A
3-phase break all lines	**600 V AC**	20 A	25 A	30 A	45 A	50 A	50 A	65 A	80 A	90 A	105 A	115 A

(1) 3-pole AF16 cannot be used. Select 4-pole non-reversing contactor AF16..-40-..

1SBC100065S0201

AF09 ... AF96 3-pole contactors
Technical data

General technical data

Contactor types	AC / DC operated	AF09	AF12	AF16	AF26	AF30	AF38
Rated insulation voltage Ui							
acc. to IEC 60947-4-1		690 V					
acc. to UL / CSA		600 V					
Rated impulse withstand voltage Uimp.		6 kV					
Electromagnetic compatibility		Devices complying with IEC 60947-1 / EN 60947-1 - Environment A and B (1)					
Ambient air temperature close to contactor							
Operation	Fitted with thermal overload relay	-25...+60 °C					
	Without thermal overload relay	-40...+70 °C					
Storage		-60...+80 °C					
Climatic withstand		Category B according to IEC 60947-1 Annex Q					
Maximum operating altitude (without derating)		3000 m					
Mechanical durability							
Number of operating cycles		10 millions operating cycles					
Max. switching frequency		3600 cycles/h					
Shock withstand							
acc. to IEC 60068-2-27 and EN 60068-2-27							
Mounting position 1							
	**Shock direction**	1/2 sinusoidal shock for 11 ms: no change in contact position, closed or open position					
	A	30 g					
	B1	25 g closed position / 5 g open position					
	B2	15 g					
	C1	25 g					
	C2	25 g					
Vibration withstand		5...300 Hz					
acc. to IEC 60068-2-6		4 g closed position / 2 g open position					

(1) Environment B: all AF09 ... AF38 contactors produced since week 08-2013. AF09 ... AF38-..-..-12 (48...130 V 50/60 Hz-DC) compliant to environment A only.
For environment B: select AF09 ... AF38-..-..-22.


Magnet system characteristics

Contactor types	AC / DC operated	AF09	AF12	AF16	AF26	AF30	AF38
Coil operating limits acc. to IEC 60947-4-1	**AC supply**	At θ ≤ 60 °C 0.85 x Uc min...1.1 x Uc max. At θ ≤ 70 °C 0.85 x Uc min...Uc max.					
	DC supply	At θ ≤ 60 °C 0.85 x Uc min...1.1 x Uc max. - (AF..Z coil 30) 0.85 ... 1.1 Uc At θ ≤ 70 °C (AF) 0.85 x Uc min...Uc max. - (AF..Z coil 20, 21 22, 23) 0.85 x Uc min...1.1 x Uc max. (AF..Z coil 30) Uc					
AC control voltage 50/60 Hz							
Rated control circuit voltage Uc		24...500 V AC					
Coil consumption	**Average pull-in value**	(AF) 50 VA - (AF..Z coil 21, 22, 23) 16 VA					
	Average holding value	(AF) 2.2 VA / 2 W - (AF..Z coil 21, 22, 23) 1.7 VA / 1.5 W					
DC control voltage							
Rated control circuit voltage Uc		12...500 V DC					
Coil consumption	**Average pull-in value**	(AF) 50 W - (AF..Z coil 20, 21, 22, 23) 12...16 W - (AF..Z coil 30) 6 W					
	Average holding value	(AF) 2 W - (AF..Z) 1.7 W					
PLC-output control		(AF..Z coil 30) ≥ 250 mA 24 V DC for PLCs and safety PLCs using broken wire detection (AF..Z coil 21) ≥ 500 mA 24 V DC for PLCs					
Drop-out voltage		≤ 60 % of Uc min.					
Voltage sag immunity acc. to SEMI F47-0706		(AF..Z coil 21, 22, 23) conditions of use on request					
Dips withstand -20 °C ≤ θ ≤ +60 °C		(AF..Z coil 21, 22, 23) 22 ms average for Uc ≥ 24 V 50/60 Hz or Uc ≥ 20 V DC					
Operating time							
Between coil energization and:	**N.O. contact closing**	40...95 ms					
	N.C. contact opening	38...90 ms					
Between coil de-energization and:	**N.O. contact opening**	11...95 ms					
	N.C. contact closing	13...98 ms					
Operating time AF..Z coil 30 - 24 V DC							
Between coil energization and:	**N.O. contact closing**	27 ... 53 ms					
	N.C. contact opening	20 ... 35 ms					
Between coil de-energization and:	**N.O. contact opening**	17 ... 29 ms					
	N.C. contact closing	22 ... 57 ms					

1SBC101427S0201 - Rev. C

AF09 ... AF38 3-pole contactors
Technical data

Mounting characteristics and conditions for use

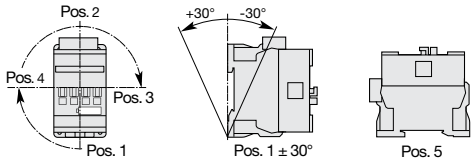Contactor types	AC / DC operated	AF09	AF12	AF16	AF26	AF30	AF38
Mounting positions							
		Max. N.C. built-in and add-on N.C. auxiliary contacts: see accessory fitting details for a 3-pole contactor AF09 ... AF38					
Mounting distances		The contactors can be assembled side by side					
Fixing							
On rail according to IEC 60715, EN 60715		35 x 7.5 mm or 35 x 15 mm					
By screws (not supplied)		2 x M4 screws placed diagonally					

Connecting characteristics

Contactor types	AC / DC operated	AF09	AF12	AF16	AF26	AF30	AF38
Main terminals		 Screw terminals with cable clamp					
Connection capacity (min. ... max.)							
Main conductors (poles)							
Rigid Solid (≤ 4 mm²)	**1 x**	1...6 mm²			2.5...10 mm²		
Stranded (≥ 6 mm²)	**2 x**	1...6 mm²			2.5...10 mm²		
Flexible with non insulated ferrule	**1 x**	0.75...6 mm²			1.5...10 mm²		
	2 x	0.75...6 mm²			1.5...10 mm²		
Flexible with insulated ferrule	**1 x**	0.75...4 mm²			1.5...10 mm²		
	2 x	0.75...2.5 mm²			1.5...4 mm²		
Bars or lugs	**L <**	9.6 mm			12.5 mm		
Connection capacity acc. to UL/CSA	**1 or 2 x**	AWG 16...10			AWG 14...8		
Stripping length		10 mm			14 mm		
Tightening torque		1.5 Nm / 13 lb.in			2.5 Nm / 22 lb.in		
Auxiliary conductors							
(built-in auxiliary terminals + coil terminals)							
Rigid solid	**1 x**	1...2.5 mm²					
	2 x	1...2.5 mm²					
Flexible with non insulated ferrule	**1 x**	0.75...2.5 mm²					
	2 x	0.75...2.5 mm²					
Flexible with insulated ferrule	**1 x**	0.75...2.5 mm²					
	2 x	0.75...1.5 mm²					
Lugs	**L <**	8 mm					
Connection capacity acc. to UL/CSA	**1 or 2 x**	AWG 18...14					
Stripping length		10 mm					
Tightening torque							
Coil terminals		1.2 Nm / 11 lb.in					
Built-in auxiliary terminals		1.2 Nm / 11 lb.in					
Degree of protection							
acc. to IEC 60947-1 / EN 60947-1 and IEC 60529 / EN 60529							
Main terminals		IP20					
Coil terminals		IP20					
Built-in auxiliary terminals		IP20					
Screw terminals		Delivered in open position, screws of unused terminals must be tightened					
Main terminals		M3.5			M4		
	Screwdriver type	Flat Ø 5.5 / Pozidriv 2			Flat Ø 6.5 / Pozidriv 2		
Coil terminals		M3.5					
	Screwdriver type	Flat Ø 5.5 / Pozidriv 2					
Built-in auxiliary terminals		M3.5					
	Screwdriver type	Flat Ø 5.5 / Pozidriv 2					

1SBC101428S0201 - Rev. A

AF09 ... AF96 3-pole contactors
Technical data

Built-in auxiliary contacts according to IEC

Contactor types	AC / DC operated	AF09	AF12	AF16	AF26	AF30	AF38	AF40	AF52	AF65	AF80	AF96
Rated operational voltage Ue max.		690 V										
Rated frequency (without derating)		50 / 60 Hz										
Conventional free air thermal current Ith - θ ≤ 40 °C		16 A										
Ie / Rated operational current AC-15												
acc. to IEC 60947-5-1	24-127 V 50/60 Hz	6 A										
	220-240 V 50/60 Hz	4 A										
	400-440 V 50/60 Hz	3 A										
	500 V 50/60 Hz	2 A										
	690 V 50/60 Hz	2 A										
Making capacity AC-15		10 x Ie AC-15 acc. to IEC 60947-5-1										
Breaking capacity AC-15		10 x Ie AC-15 acc. to IEC 60947-5-1										
Ie / Rated operational current DC-13												
acc. to IEC 60947-5-1	24 V DC	6 A / 144 W										
	48 V DC	2.8 A / 134 W										
	72 V DC	1 A / 72 W										
	110 V DC	0.55 A / 60 W										
	125 V DC	0.55 A / 69 W										
	220 V DC	0.27 A / 60 W										
	250 V DC	0.27 A / 68 W										
	400 V DC	0.15 A / 60 W										
	500 V DC	0.13 A / 65 W										
	600 V DC	0.1 A / 60 W										
Short-circuit protection device gG type fuse		10 A										
Rated short-time withstand current Icw	for 1.0 s	100 A										
	for 0.1 s	140 A										
Minimum switching capacity		12 V / 3 mA										
with failure rate acc. to IEC 60947-5-4		10^{-7}										
Non-overlapping time between N.O. and N.C. contacts		≥ 2 ms										
Power dissipation per pole at 6 A		0.1 W										
Max. electrical switching frequency	AC-15	1200 cycles/h										
	DC-13	900 cycles/h										
Mechanically linked contacts acc. to annex L of IEC 60947-5-1		Built-in N.O. or N.C. auxiliary contacts and additional N.O. or N.C. auxiliary contacts (CA4, CAL4, CAT4 aux. contact blocks) are mechanically linked contacts.										
Mirror contacts acc. to annex F of IEC 60947-4-1		Built-in N.C. auxiliary contacts or additional N.C. auxiliary contacts (CA4, CAL4, CAT4 aux. contact blocks) are mirror contacts.										

Built-in auxiliary contacts according to UL / CSA


Contactor types	AC / DC operated	AF09	AF12	AF16	AF26	AF30	AF38	AF40	AF52	AF65	AF80	AF96
Max. operational voltage		600 V AC, 600 V DC										
Pilot duty		A600, Q600										
AC thermal rated current		10 A										
AC maximum volt-ampere making		7200 VA										
AC maximum volt-ampere breaking		720 VA										
DC thermal rated current		2.5 A										
DC maximum volt-ampere making-breaking		69 VA										

1SBC101445S0201 - Rev. A


AF09 ... AF96 3-pole contactors
Terminal marking and positioning

AF09 ... AF96 contactors - AC / DC operated

Standard devices without addition of auxiliary contacts




AF09 ... AF16..-30-10




AF09 ... AF16..-30-01




AF26 ... AF96..-30-00




AF09 ... AF16..-30-10




AF09 ... AF16..-30-01




AF26 ... AF96..-30-00




AF09 ... AF16..-30-22




AF26 ... AF96..-30-22




AF26 ... AF38..-30-11




AF40 ... AF96..-30-11



AF09 ... AF96..-30-22




AF26 ... AF38..-30-11




AF40 ... AF96..-30-11


Other possible contact combinations with auxiliary contacts added by the user

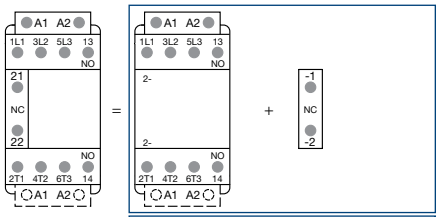


Combination 11 = AF09 ... AF16..-30-10 + CA4-01

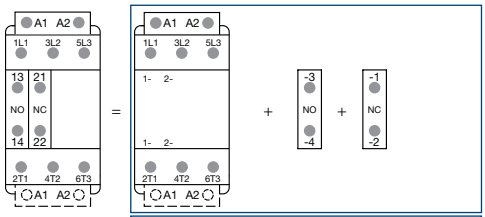


Combination 11 = AF26 ... AF96..-30-00 + CA4-10 + CA4-01




Combination 11

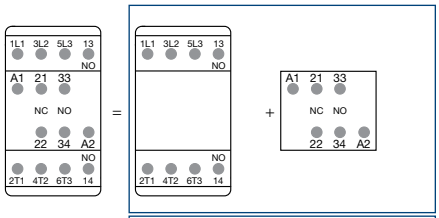


Combination 21 = AF09 ... AF16..-30-10 + CAT4-11M

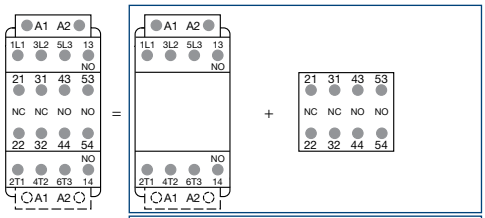


Combination 32 = AF09 ... AF16..-30-10 + CA4-22M




Combination 21



Combination 32

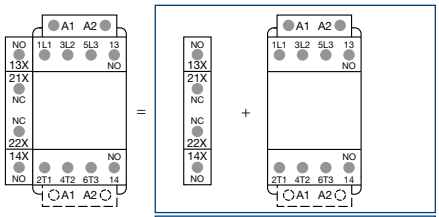

Combination 21 = CAL4-11 + AF09 ... AF16..-30-10




Combination 21

Note: only AF..Z contactor with DC control voltages 12...20 V DC (coil 20) and 24 V DC (coil 30) need to respect the connection polarities indicated close to the coil terminals: A1+ for the positive pole and A2- for the negative pole.


1SBC101463S0201 - Rev. B

AF09, AF12, AF16 3-pole contactors


Main dimensions mm, *inches*

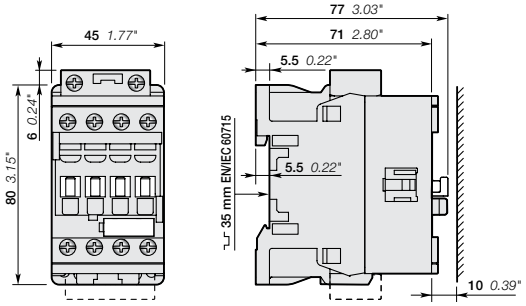


AF09, AF12, AF16




AF09, AF12, AF16

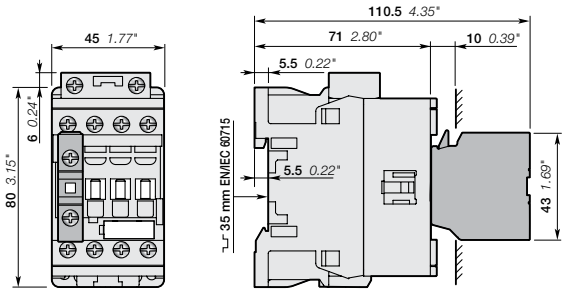


AF09, AF12, AF16
+ CA4, CC4 1-pole auxiliary contact block

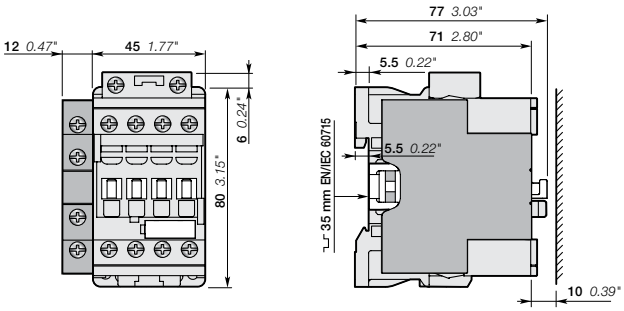


AF09, AF12, AF16
+ CAL4-11 2-pole auxiliary contact block

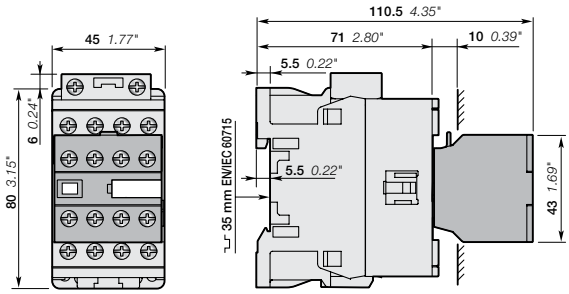


AF09, AF12, AF16
+ CA4 4-pole auxiliary contact block

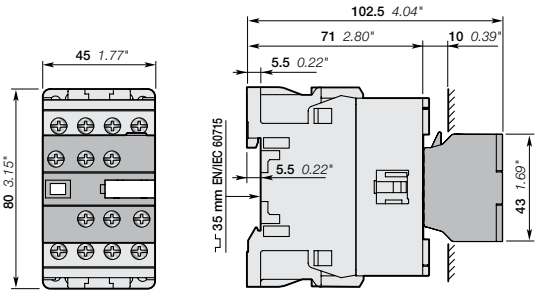

AF09, AF12, AF16
+ CAT4 2-pole auxiliary contact and coil terminal block

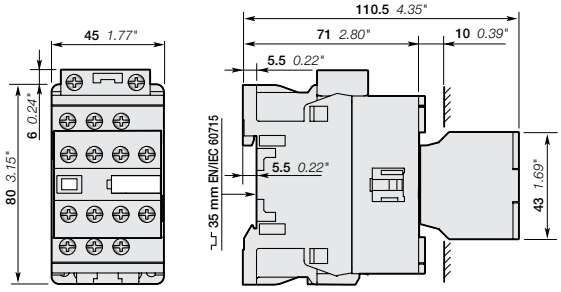

AF09, AF12, AF16..-30-22

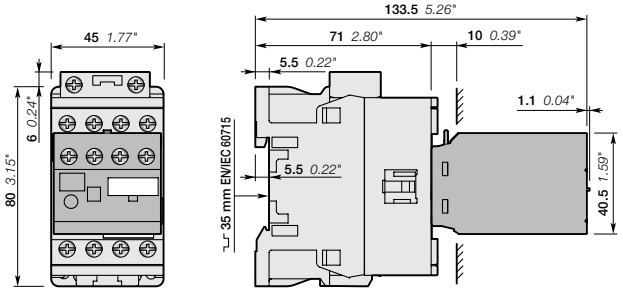


AF09, AF12, AF16
+ TEF4 electronic timer

Note: contactor lateral distance to grounded component 2 mm 0.08" min.
24 V DC operated contactor (coil 30) depth + 20 mm + 0.79".


1SBC101682S0201 - Rev. B

AF09, AF12, AF16 3-pole contactors


Main dimensions mm, *inches*

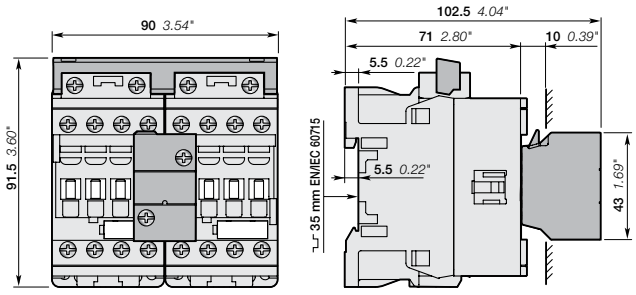


AF09, AF12, AF16
+ VEM4 mechanical and electrical interlock set

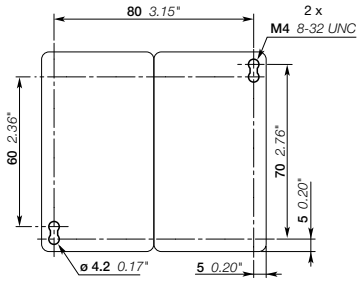


AF09, AF12, AF16
+ VEM4 mechanical and electrical interlock set

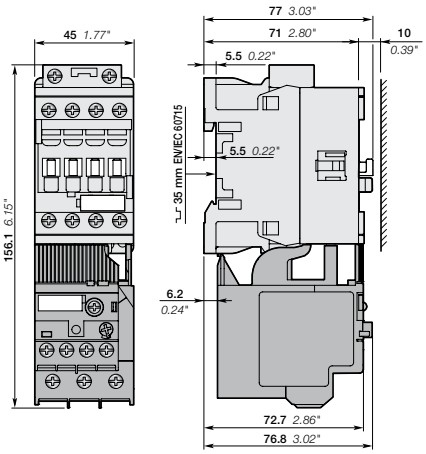

AF09, AF12, AF16
+ TF42 thermal overloard relay



AF09, AF12, AF16
+ TF42, EF19

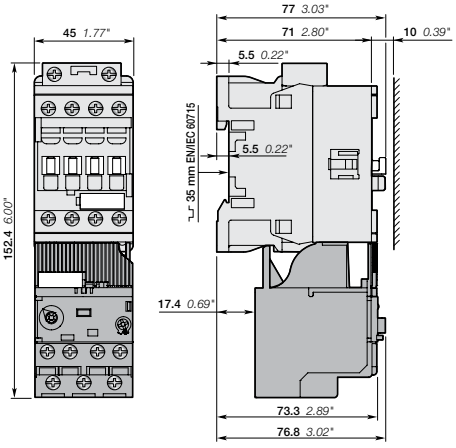


AF09, AF12, AF16 3-pole contactors
+ EF19 electronic overload relay

Note: contactor lateral distance to grounded component 2 mm 0.08" min.
24 V DC operated contactor (coil 30) depth + 20 mm + 0.79".


1SBC101682S0201 - Rev. B

AF26, AF30, AF38 3-pole contactors


Main dimensions mm, *inches*

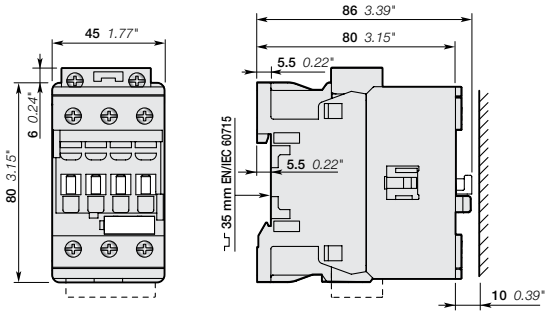


AF26, AF30, AF38




AF26, AF30, AF38

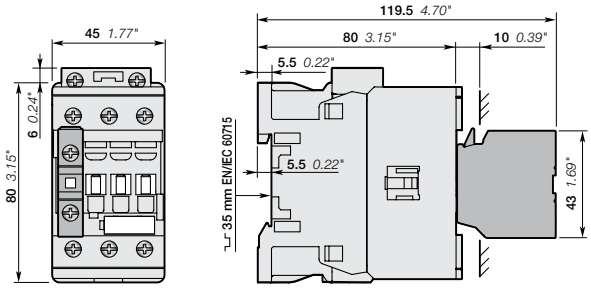


AF26, AF30, AF38
+ CA4, CC4 1-pole auxiliary contact block

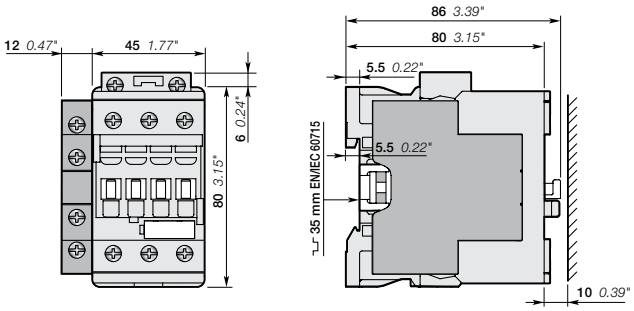


AF26, AF30, AF38
+ CAL4-11 2-pole auxiliary contact block

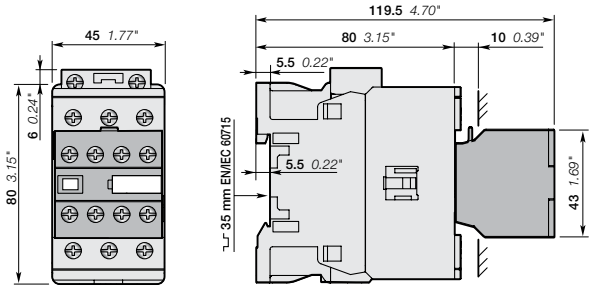


AF26, AF30, AF38
+ CA4 4-pole auxiliary contact block

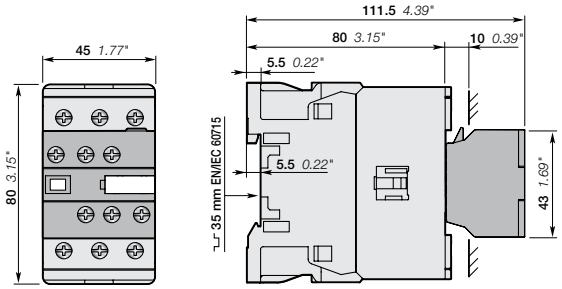

AF26, AF30, AF38
+ CAT4 2-pole auxiliary contact and coil terminal block

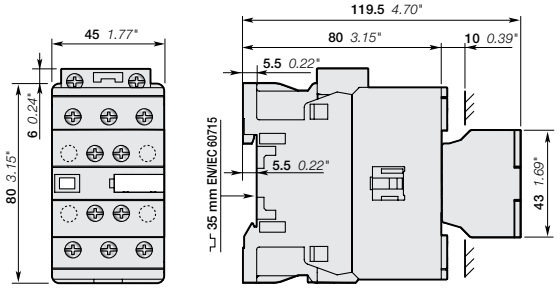

AF26, AF30, AF38..-30-11
AF26, AF30, AF38..-30-22

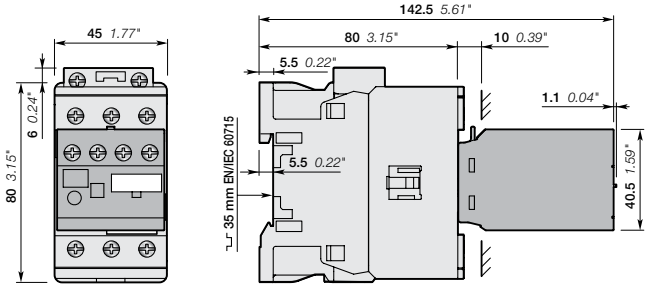


AF26, AF30, AF38
+ TEF4 electronic timer

Note: contactor lateral distance to grounded component 2 mm (0.08") min.
24 V DC operated contactor (coil 30) depth + 20 mm (+ 0.79").


1SBC101683S0201 - Rev. B

AF26, AF30, AF38 3-pole contactors


Main dimensions mm, *inches*

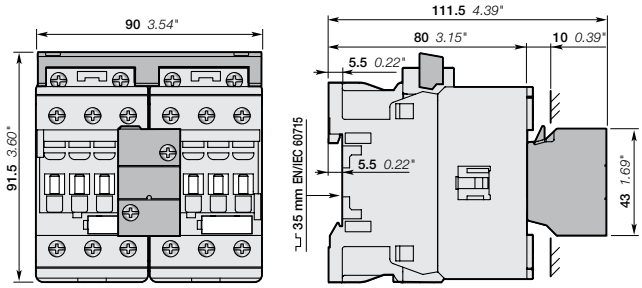


AF26, AF30, AF38
+ VEM4 mechanical and electrical interlock set

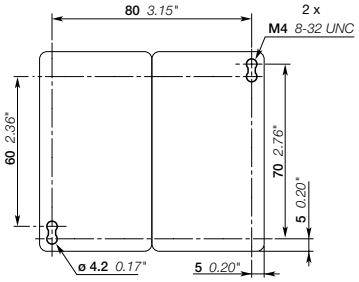


AF26, AF30, AF38
+ VEM4 mechanical and electrical interlock set

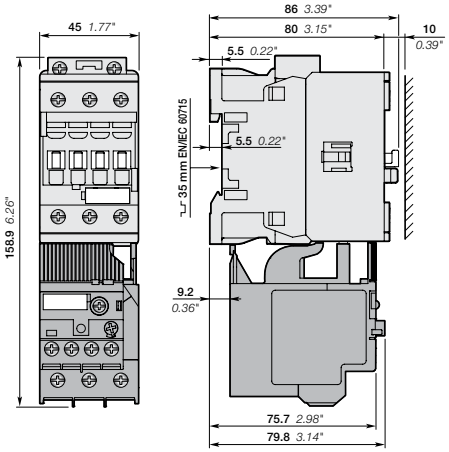


AF26, AF30, AF38
+ TF42 thermal overload relay



AF26, AF30, AF38
+ TF42, EF19, EF45

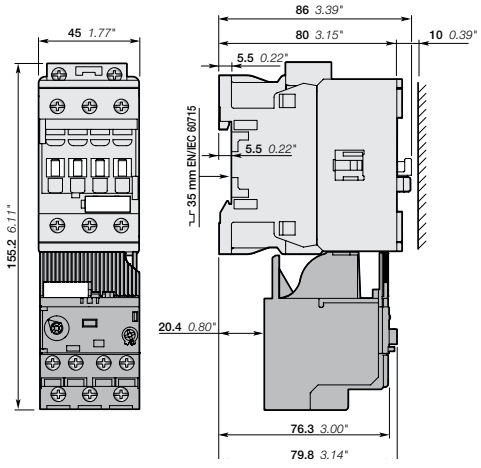

AF26 3-pole contactors
+ EF19 electronic overload relay

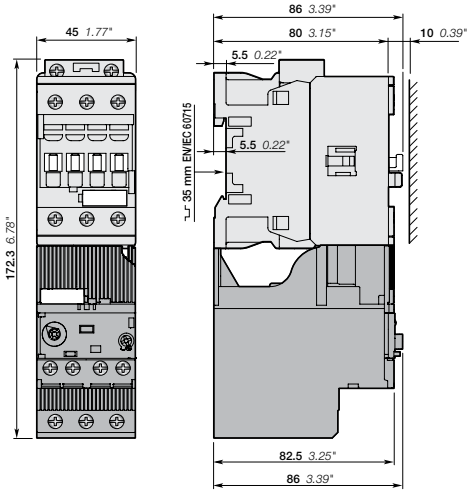

AF26, AF30, AF38 3-pole contactors
+ EF45 electronic overload relay

Note: contactor lateral distance to grounded component 2 mm (0.08") min.
24 V DC operated contactor (coil 30) depth + 20 mm (+ 0.79").

1SBC101683S0201 - Rev. B