
DURACELL®
COPPERTOP

MN1500
Size: AA (LR6)
Alkaline-Manganese Dioxide Battery


Zn/MnO_2




Nominal voltage	1.5 V
Impedance	71 m-ohm @ 1 kHz
Typical weight	24 g (0.8 oz)
Typical volume	8.4 cm^3 (0.5 in^3)
Terminals	Flat
Storage temperature range	5ºC to 30ºC (41ºF to 86ºF)
Operating temperature range	-20ºC to 54ºC (-4ºF to 130ºF)
Designation	**ANSI:** 15A **IEC:** LR6

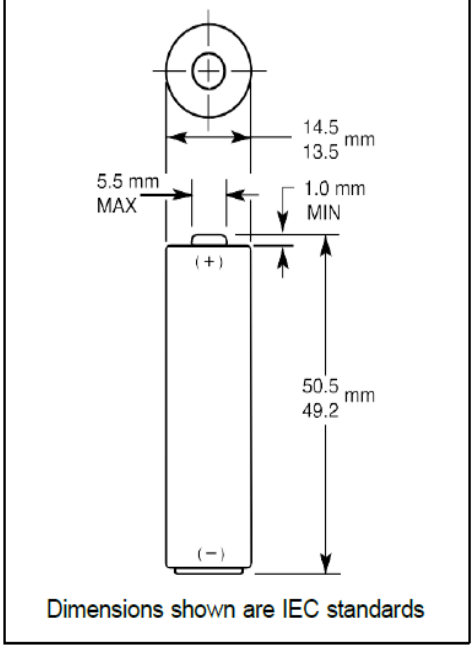

Dimensions shown are IEC standards

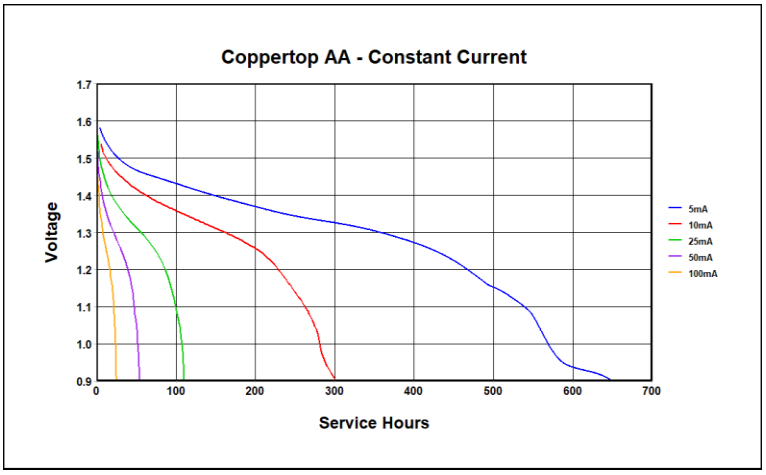

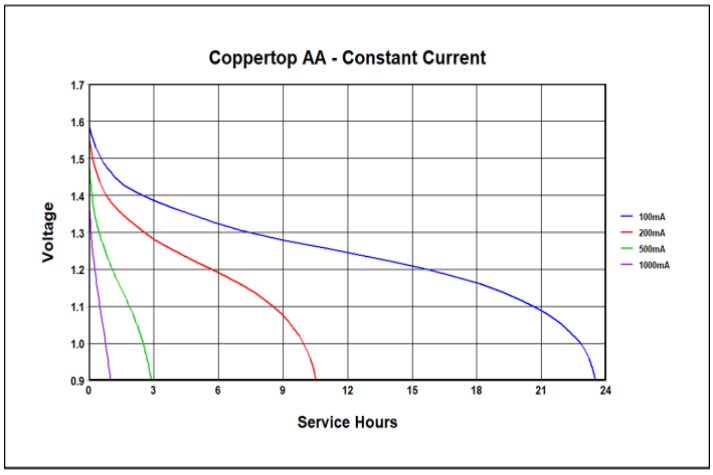

DURACELL®
A Berkshire Hathaway Company
Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com


Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.


This data is subject to change. Performance information is typical. Contact Duracell for the latest information.


DURACELL®
COPPERTOP

MN1500
Size: AA (LR6)
Alkaline-Manganese Dioxide Battery

Zn/MnO_2

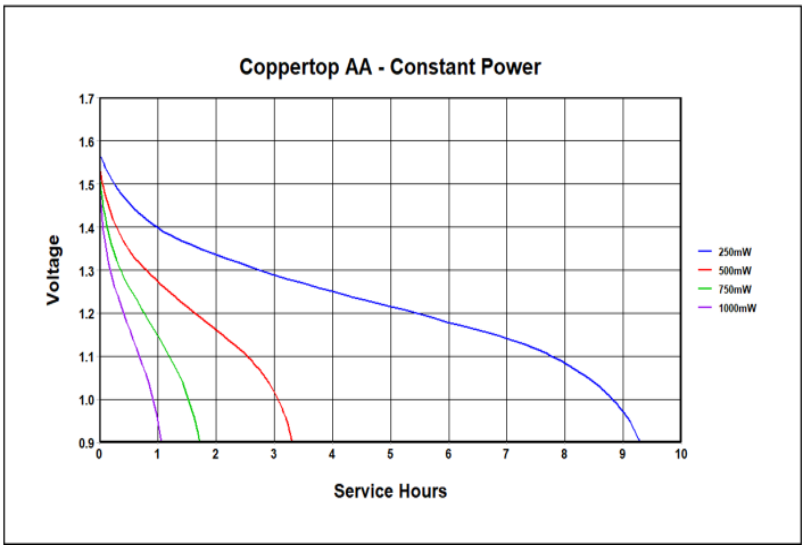

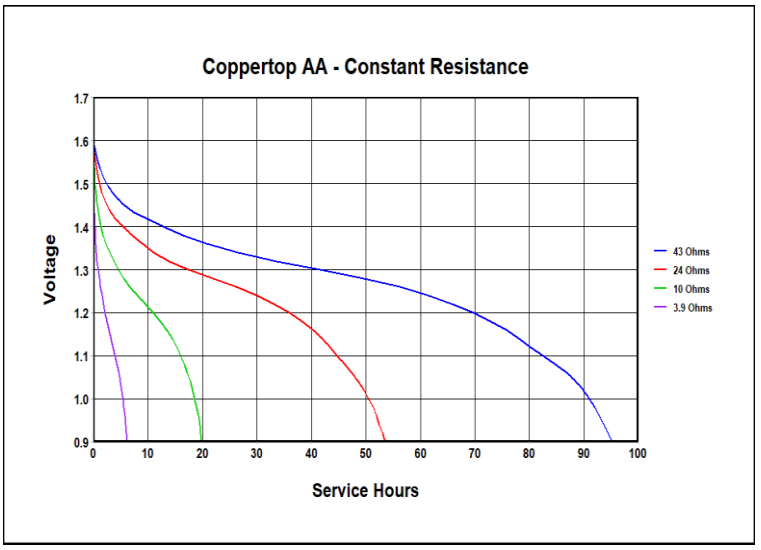

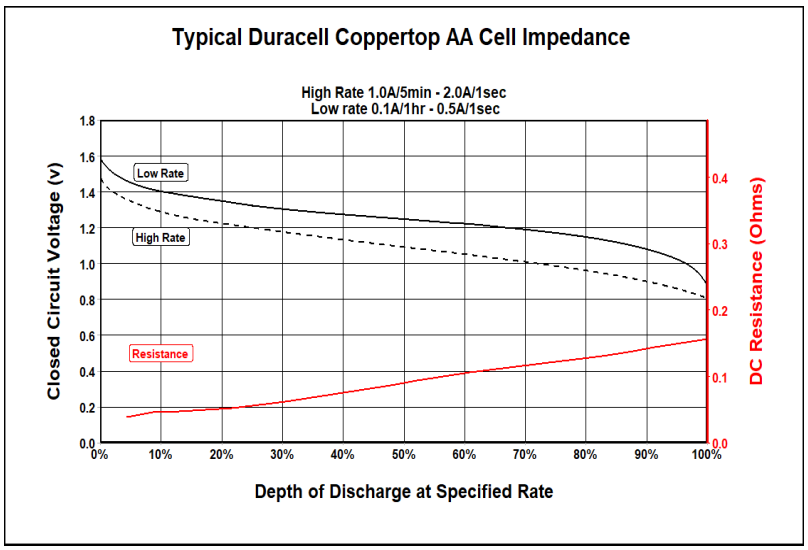

DURACELL®

A Berkshire Hathaway Company
Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.