MENNEKES
MY POWER CONNECTION

Connector
PowerTOP Plus

Part number: 3414



MENNEKES
Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1
57399 Kirchhundem
GERMANY

www.**MENNEKES**.org

Version May 24 2026 Subject to change without notice. No liability accepted for printing errors.

Product Description

- screw connection technology ErgoCONTACT
- enclosure with thread lock and safety slide
- X-CONTACT
- protection against kinking
- strain relief
- cable gland and sealing
- area for self-adhesive labels

Technical Details

Connector PowerTOP Plus	3414
Product serie	PowerTOP Plus
Ampere	32A
Number of poles	3p
Clock position	6h
Nominal voltage AC	230V
Nominal frequency	50 - 60 Hz
Protection type IP	IP44
Contact carrier	standard
X-CONTACT	yes
Connection	screw terminals - ErgoCONTACT
Contact screw drive	PZ2, slot
Tightening torque connection terminal	1.8 Nm
Recommended wire end treatment for supply cable connection terminal	ferrule square gasproof crimped
Strip length jacket	60 mm
Strip length conductor PH + N	12 - 15 mm
Strip length conductor PE	12 - 15 mm
Pilot contact	without pilot contact
Conductor cross-section min.	2.5 mm^2
Conductor cross-section max.	6 mm^2
Cable kink protection	integrated in cable gland
Protective grommet	without protective grommet

Connector PowerTOP Plus	3414
Militärausführung	nein
Weight (net)	325 g
Packaging unit	10 pcs
Quantity per pallet	540 pcs
EAN / identification number	4015394296522

Permissible ambient conditions

	Min.	Max.
Permissible ambient temperature	-25 °C	40 °C

Material properties

Cover	PA6 squirrel grey [similar RAL 7000]
Front part	PA6 blue [similar RAL 5007]
Hinged lid	PC blue [similar RAL 5007]
Clamp basket	PA6 natural colour [no RAL colour code]
	TPE natural colour [no RAL colour code]
Fastening	PA6 squirrel grey [similar RAL 7000]

Material resistance


The material resistance overview can be found on the website in the section “Knowledge” - “Product knowledge” - “Materials”.

Material and environmental properties

RoHS 2011/65/EU incl. 2015/863/EU	✓
POP regulation (EU) 2019/1021	✓
Halogen-free	yes

Regulations and Standards	
Norm	DIN EN IEC 60309-2
Declaration of Conformity	CE
Test label	CB Zertifikat, VDE, CQC, EAC

Dimensional Drawing

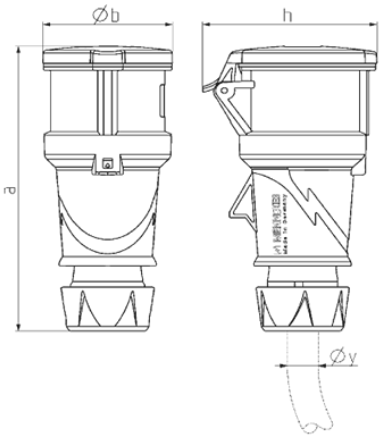

Drawing	Amp.	16			32		
3 MB 80	Poles	3	4	5	3	4	5
Dim. in mm	a	155	167	164	202	202	200
	b	55	68	69	78	78	80
	h	72	92	98	100	100	107
y min. from		7	8	8	10.5	10.5	13.5
to max. mm		–13	–15.5	–15.5	–18	–18	–20
Terminal for cond. cross		1	1	1	–2.5	–2.5	–2.5
section (mm^2) min.-max.		–2.5	–2.5	–2.5	–6	–6	–6