


0620 KSS 浪管 FLEXIBLE CONDUIT



材質：高密度 PE (灰色)，備有EVA材質。
用途：適用於電纜之保護，可代替 PVC塑膠管。
● 另備有黑色，歡迎來電洽詢。

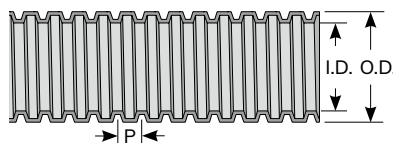

● 密封型


單位：mm

型號 Item No.	內徑 I.D.	外徑 O.D.	P	適用固定頭	包裝 Packing
BG-10P	7.4±0.4	10.2±0.4	2.6±0.3	BG-10	300M
BG-14P	10.7±0.4	14.1±0.4	2.6±0.3	BG-14	100M
BG-16P	10.7±0.4	16.0±0.4	3.2±0.4	BG-16, BGQ-16	
BG-18P (3分)	13.8±0.4	17.5±0.4	3.2±0.4	BG-18, BGQ-18	
BG-20P	14.8±0.4	20.0±0.4	3.8±0.4	BG-20, BGQ-20	
BG-22P (4分)	17.2±0.4	22.0±0.4	3.2±0.4	BG-22, BGQ-22	
BG-25P	18.3±0.4	25.0±0.4	4.3±0.4	BG-25, BGQ-25	
BG-26P (6分)	21.2±0.4	25.8±0.4	3.2±0.4	BG-26, BGQ-26	
BG-32P	24.3±0.4	32.0±0.4	5.0±0.5	BG-32, BGQ-32	50M
BG-34P (1吋)	28.7±0.4	34.0±0.4	3.2±0.4	BG-34, BGQ-34	
BG-40P	31.2±0.4	40.0±0.4	5.8±0.5	BG-40	
BG-42P (1吋2)	34.9±0.4	42.0±0.4	3.2±0.4	BG-42	
BG-48P (1吋半)	40.0±0.5	48.0±0.5	4.6±0.4	BG-48	
BG-50P	39.6±0.5	50.0±0.5	7.4±0.6	BG-50	
BG-55P (歐規2吋)	47.5±0.4	54.5±0.5	3.2±0.4		
BG-60P (2吋)	52.0±0.5	60.0±0.5	6.2±0.5		30M
BG-76P (2吋半)	62.0±0.5	76.0±0.5	6.2±0.5		

0620 KSS 尼龍浪管 NYLON FLEXIBLE CONDUIT



材質：NYLON 6 (黑色)，防火等級94HB。
用途：適用於電纜之保護。
特點：彈性佳，可塑性良好。
▲ 剖開型尼龍浪管可搭配撥開式結束帶安裝工具 (參考P.102) 同時使用，便可瞬間完成整線工作。
※ 另備有PP材質，歡迎來電洽詢。

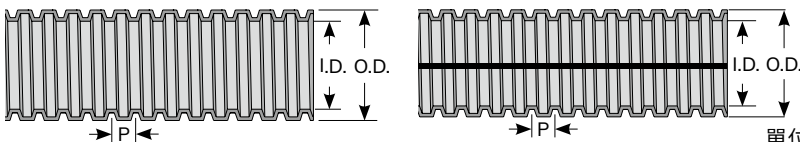

單位：mm

型號 Item No.		公稱尺寸	內徑 I.D.	外徑 O.D.	P	適用固定頭	包裝 Packing
密封型	剖開型	Inch					
PA-07	PAO-07	1/4"	6.0±0.25	9.8±0.35	3.3±0.4	PAQ-0707, PAQ-0709	50M
PA-10	PAO-10	5/16"	9.0±0.25	13.0±0.35	3.0±0.4	PAQ-1009	
PA-12	PAO-12	3/8"	11.4±0.35	15.5±0.35	3.0±0.4	PAQ-1209, PAQ-1211, PAQ-12135, PAQ-1216	
PA-17	PAO-17	1/2"	16.3±0.35	21.6±0.45	3.3±0.4	PAQ-17135, PAQ-1716, PAQ-1721	
PA-23	PAO-23	3/4"	22.4±0.45	28.2±0.45	3.6±0.4	PAQ-2321	
PA-29	PAO-29	1"	27.9±0.45	34.0±0.45	3.6±0.4	PAQ-2929	
PA-36	PAO-36	1 1/4"	35.8±0.45	42.4±0.6	3.3±0.4	PAQ-3636	25M
PA-48	PAO-48	2"	47.5±0.6	54.5±0.6	3.0±0.4	PAQ-4848	