
CABLE GLANDS

- Time saving, cable can be easily once inserted into through the gland without dismantling the parts.
- Suggested clearance hole for non-threaded mounting
- Suitable for fixing wires of machines, electrical applications, mechanical control boards/ boxes.
- The gland can stand the temp. up to140ºC (284°F) in short time.
- Material: UL approved Polyamide 6.6, 94V-2
  Neoprene for seal insert, with nut
- Color: Black, gray, light gray





*PG Gland/ Metric Gland

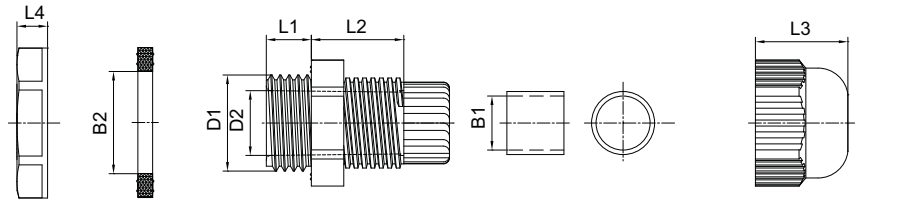

Lock nut Washer Body Seal Pressing Screw


IP68 RoHS

Part No.	(mm)	D1 (mm)	D2 (mm)	B1 (mm)	B2 (mm)	L1 (mm))	L2 (mm)	L3 (mm)	D (mm)	Cable Range	Package (pcs/bag)
PG Gland Range / PG											
PG-07	ø13.0	ø12.5	ø7.5	ø7.2	ø12.5	8.0	14.5	13	5	3~6.5	100
PG-09	ø15.7	ø15.2	ø10.0	ø9.9	ø15.2	8.0	15.5	15.3	5	4~8	100
PG-11	ø19.1	ø18.6	ø13.5	ø13.1	ø18.6	8.0	17.0	17.5	5	5~10	100
PG-13.5	ø20.9	ø20.4	ø13.5	ø13.1	ø20.4	10.0	17.0	17.5	6	6~12	100
PG-16	ø23.0	ø22.5	ø17.5	ø17.0	ø22.5	10.0	19.0	19.5	6	10~14	100
PG-21	ø28.8	ø28.3	ø21.4	ø21.0	ø28.3	10.0	21.2	25	7	13~18	100
PG-29	ø37.5	ø37.0	ø28.8	ø28.0	ø37.0	11.0	23.4	25.5	7	18~25	50
PG36	ø47.5	ø47.0	ø36.5	ø35.3	ø47.0	12.0	27.8	30	8	22~32	50
PG-42	ø54.5	ø54.0	ø38.5	ø38.0	ø54.0	14.6	31.0	32	8	28~38	50
PG-48	ø59.8	ø59.3	ø46.0	ø45.5	ø59.3	15.5	30.6	34.5	8	35~45	50

Part No.	(mm)	D1 (mm)	D2 (mm)	B1 (mm)	B2 (mm)	L1 (mm))	L2 (mm)	L3 (mm)	D (mm)	Cable Range	Package (pcs/bag)
Metric Gland Range											
M12	ø12.5	ø12	ø7.5	ø7.2	ø12.5	8.0	14.5	13.0	5	3~6.5	100
M16	ø16.5	ø16	ø11.0	ø9.9	ø16.5	7.5	15.5	15.3	5	4~8	100
M20	ø20.5	ø20	ø17.5	ø17.0	ø20.5	10.0	19.0	19.5	6	10~14	100
M25	ø25.5	ø25	ø21.4	ø21.0	ø25.5	11.0	21.2	25.0	6	13~18	100
M32	ø32.5	ø32	ø27.0	ø28.0	ø32.5	10.3	23.4	25.5	7	18~25	50
M40	ø40.5	ø40	ø36.5	ø35.3	ø40.5	12.0	27.8	30.0	7	22~32	50
M50	ø50.5	ø50	ø38.5	ø38.0	ø50.5	12.0	31.0	32.0	8	28~38	50
M63	ø63.5	ø63	ø46.0	ø45.5	ø63.5	15.5	30.6	34.5	8	35~45	50

Part No.	Thread (inch)	D1 (mm)	D2 (mm)	B1 (mm)	L1 (mm))	L2 (mm)	L3 (mm)	Cable Range
NPT Gland Range								
EN-12A	NPT3/8”	ø17.05	ø18.3	ø9.0	13	15.1	17.2	4~7
EN-12B	NPT3/8”	ø17.05	ø18.3	ø11.0	13	15.1	17.2	6~10
EN-17A	NPT1/2”	ø21.22	ø22.3	ø12.0	15	16.8	19.2	8~11
EN-17B	NPT1/2”	ø21.22	ø22.3	ø14.0	15	16.8	19.2	8.5~14
EN-23A	NPT3/4”	ø26.57	ø28.2	ø17.0	15	20.3	22.6	10~16
EN-23B	NPT3/4”	ø26.57	ø28.2	ø19.7	15	20.3	22.6	12.5~18
EN-28A	NPT1”	ø33.23	ø37.0	ø23.6	17	20.5	26.4	16~22
EN-28B	NPT1”	ø33.23	ø37.0	ø26.6	17	20.5	26.4	18~25
EN-36A	NPT1-1/4”	ø41.98	ø52.0	ø28.6	17	27.8	30.0	20~25
EN-36B	NPT1-1/4”	ø41.98	ø52.0	ø35.3	17	27.8	30.0	24~32

* NPT Gland Range

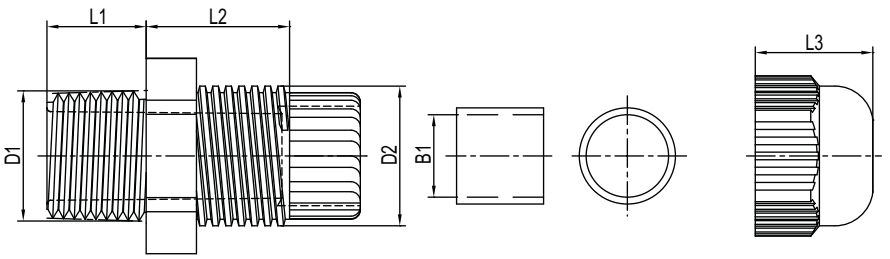

Body Seal Pressing Screw