

| | | |
|---|---|---|
| **BPR10K** | | |
| **Product** | | Potentiometer |
| **Dia** | | 22 mm |
| **Dielectric Strength (Contact-Contact)** | | 1750 Vrms |
| **Isolation Resistance** | | 10 MΩ min. (500V DC) |
| **Operating Temperature** | | -15 / + 80 °C |
| **Pollution Degree** | | 3 |
| **Protection Degree** | | IP65 |
| **Cable Section** | | 0.75-1.5 mm2 |
| **Screw Torque** | | 1,5 Nm |
| **Maximum Current** | | 12,20 mA |
| **Spin Angle** | | 270° |
| **Production Time** | | 31.12.1899 00:00:00 |
| **Serial** | | B Series Plastic |
| **Resistive Value** | | 10 kΩ |
| **Maximum Power** | | 1,5 W (70ºC) |
| **Specifications** | Non-flammable V0 PA6.6 | |
| | Variety of impedances | |
| | IP65 protection from front side | |
| **Standards / Certificates** | IEC 60393-1 | |

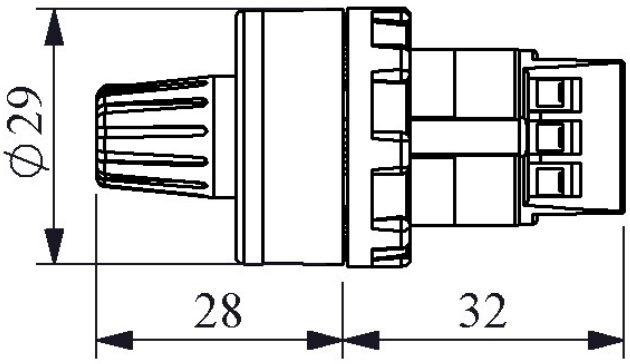

Montaj Ölçüsü Ø22.4 ±0.2 mm

Devre Şeması

