SIEMENS

## Data sheet 3VM1150-4EE32-0AA0



circuit breaker 3VM1 IEC frame 160 breaking capacity class S Icu=36kA @ 415V 3-pole, line protection TM220, ATFM, In=50A overload protection Ir=35A...50A short-circuit protection Ii=10 x In nut keeper kit (for products not manufactured in China, only CE and EEQCO Scheme-X certifications are available)

| | |
|---|---|
| **Model** | |
| product brand name | SENTRON |
| product designation | Molded case circuit breaker |
| design of the product | Line protection |
| design of the overcurrent release | TM220 |
| protection function of the overcurrent release | LI |
| number of poles | 3 |
| **General technical data** | |
| insulation voltage / rated value | 800 V |
| operating voltage / at AC / at 50/60 Hz / rated value | 500 V |
| operating voltage / at DC / rated value | 500 V |
| operating voltage / at AC / rated value | 690 V |
| power loss [W] / maximum | 15 W |
| power loss [W] / for rated value of the current / at AC / in hot operating state / per pole | 4.87 W |
| mechanical service life (operating cycles) / typical | 15 000 |
| electrical endurance (operating cycles) / at AC-1 / at 380/415 V | 6 000 |
| product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof | No |
| ground-fault monitoring version | Without |
| product function | |
| ● communication function | No |
| ● other measurement function | No |
| Net Weight | 967 g |
| **Current** | |
| operational current | |
| ● at 40 °C | 50 A |
| ● at 45 °C | 50 A |
| ● at 50 °C | 50 A |
| ● at 55 °C | 49 A |
| ● at 60 °C | 48 A |
| ● at 65 °C | 46 A |
| ● at 70 °C | 45 A |
| **Switching capacity according to IEC 60947** | |
| switching capacity class of the circuit breaker | S |
| maximum short-circuit current breaking capacity (Icu) | |
| ● at 240 V | 55 kA |
| ● at 415 V | 36 kA |
| ● at 440 V | 25 kA |


Subject to change without notice
© Copyright Siemens

| | |
|---|---|
| ● at 500 V | 7 kA |
| operating short-circuit current breaking capacity (Ics) | |
| ● at 240 V | 41 kA |
| ● at 415 V | 27 kA |
| ● at 440 V | 18 kA |
| ● at 500 V | 5 kA |
| short-circuit current making capacity (Icm) | |
| ● at 240 V | 121 kA |
| ● at 415 V | 76 kA |
| ● at 440 V | 53 kA |
| ● at 500 V | 12 kA |
| design of short-circuit protection | For switching capacity values in DC power systems, see the 3VA Molded Case Circuit Breaker Manual; link available under Service & Support in the last chapter |
| **Adjustable parameters** | |
| product feature / for L-tripping / can be switched on/off | No |
| adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic | |
| ● minimum | 35 A |
| ● maximum | 50 A |
| adjustable response value delay time (tr) / for L-tripping / with I2t characteristic | |
| ● minimum | 1 s |
| ● maximum | 1 s |
| adjustable response value setting current (Ii) / for I-tripping | |
| ● minimum | 500 A |
| ● maximum | 500 A |
| adjustable setting current (InN) / for N-tripping | |
| ● minimum | 0 A |
| ● maximum | 0 A |
| adjustable current response value current / of instantaneous short-circuit trip unit | |
| ● maximum | 500 A |
| product function / grounding protection | No |
| **Mechanical Design** | |
| product component | |
| ● undervoltage release | No |
| ● voltage trigger | No |
| ● trip indicator | No |
| height [in] | 5.12 in |
| height | 130 mm |
| width [in] | 3 in |
| width | 76.2 mm |
| depth [in] | 2.76 in |
| depth | 70 mm |
| **Connections** | |
| arrangement of electrical connectors / for main current circuit | Front connection |
| type of electrical connection / for main current circuit | nut keeper kit on both ends |
| type of connectable conductor cross-sections / for flat-bar terminal connection / minimum | 12 x 1 mm |
| type of connectable conductor cross-sections / for flat-bar terminal connection / maximum | 17 x 6.5 mm |
| design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) | Silver |
| design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) | Tin |
| **Auxiliary circuit** | |
| number of CO contacts / for auxiliary contacts | 0 |
| **Accessories** | |
| product extension / optional / motor drive | No |
| **Environmental conditions** | |


Subject to change without notice
© Copyright Siemens

| | |
|---|---|
| protection class IP / on the front | IP40 |
| ambient temperature | |
| ● during operation / minimum | -25 °C |
| ● during operation / maximum | 70 °C |
| ● during storage / minimum | -40 °C |
| ● during storage / maximum | 80 °C |

## Approvals / Certificates

### General Product Approval







Miscellaneous



Confirmation




| General Product Approval | Test Certificates | | Maritime application | | |
|---|---|---|---|---|---|
|  | Type Test Certificates/Test Report | Miscellaneous |   |   |   |

| Maritime application | | | other | | Environment |
|---|---|---|---|---|---|
|   |   | CCS (China Classification Society) |   | Confirmation | Environmental Confirmations |


### Environment


Environmental Confirmations


## Further information

**Information on the packaging**
https://support.industry.siemens.com/cs/ww/en/view/109813875
**Information for data generation and storage**
https://support.industry.siemens.com/cs/ww/en/view/109995012
**Information- and Downloadcenter (Catalogs, Brochures,…)**
https://www.siemens.com/lowvoltage/catalogs
**Industry Mall (Online ordering system)**
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VM1150-4EE32-0AA0
**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
https://support.industry.siemens.com/cs/ww/en/ps/3VM1150-4EE32-0AA0
**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VM1150-4EE32-0AA0
**CAx-Online-Generator**
https://www.siemens.com/cax
**Tender specifications**
https://www.siemens.com/specifications
**Kennlinien**
https://curves.simaris.siemens.com/curves/3VM1150-4EE32-0AA0


© Copyright Siemens

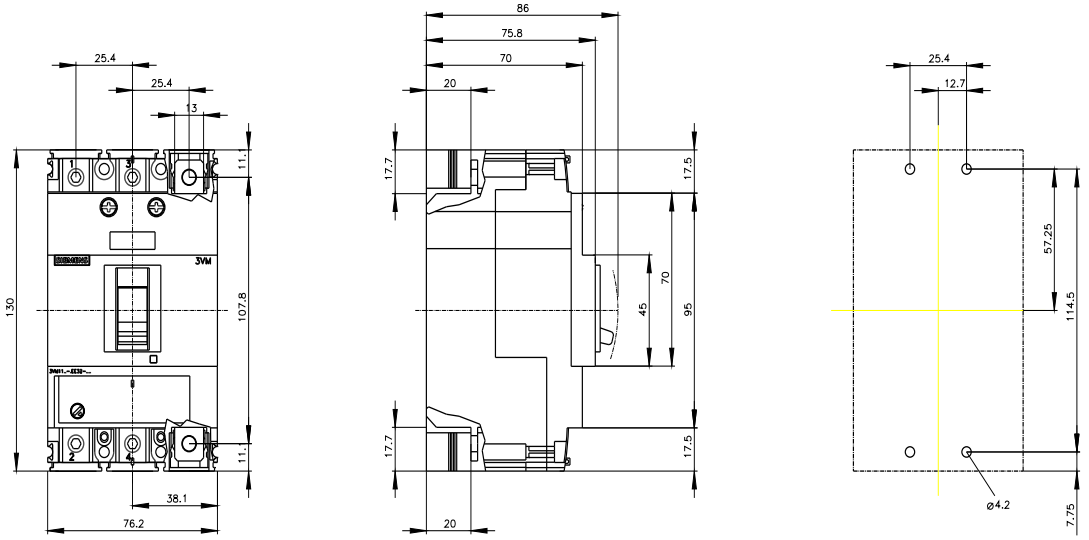



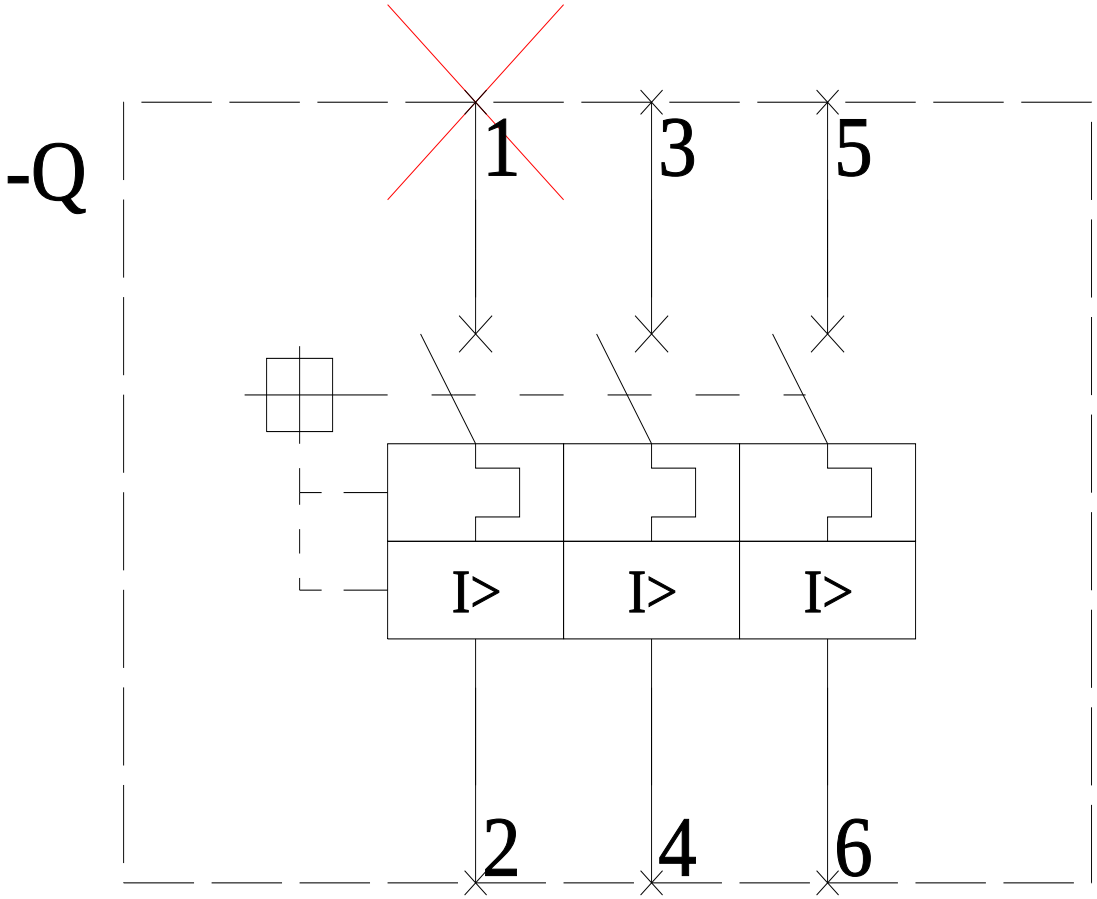
**last modified:** 4/4/2025


Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens