
0105 KSS WIRING DUCT (SOLID)

E97527 82854 94V-0

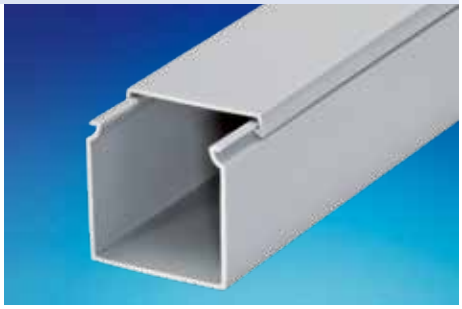


SOLID: No slot design, for external wiring or where wire extraction is not necessary.

- Material: UL94V-0 and M1 flame rated, UL approved PVC.
- Color: Grey.
- PVC service temperature: 85°C
- UL Test up to 50°C
- These devices are for routing of wires within devices in factory installations.
- Solid type can protect wire from dust or external damage by mouse.
- Special color, size, length upon request at reasonable quantity.

※The standard wiring duct can be available for non-slip cover, suitable for vertical installations. The item number please specify for example,

Item no. ：SD-2525➔SQ-2525

Non-slip cover for the size less than 20mm width or bigger than 125mm is available upon request.

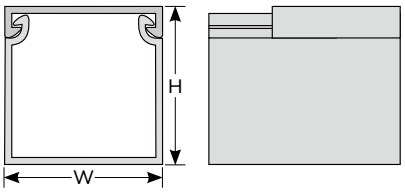


Item No.	W x H mm	Length
SD-1616	16 X 16	2M
SD-2516	25 X 16	
SD-3816	38 X 16	
SD-2020	20 X 20	
SD-4020	40 X 20	
SD-1525	15 X 25	
SD-2525	25 X 25	
SD-3825	38 X 25	
SD-5025	50 X 25	
SD-3333	33 X 33	
SD-3340	33 X 40	
SD-4040	40 X 40	
SD-6040	60 X 40	
SD-7540	75 X 40	
SD-8040	80 X 40	
SD-10040	100 X 40	
SD-3345	33 X 45	
SD-4545	45 X 45	
SD-6545	65 X 45	
SD-5050	50 X 50	

Item No.	W x H mm	Length
SD-7550	75 X 50	2M
SD-10050	100 X 50	
SD-4060	40 X 60	
SD-6060	60 X 60	
SD-8060	80 X 60	
SD-10060	100 X 60	
SD-4565	45 X 65	
SD-6565	65 X 65	
SD-5075	50 X 75	
SD-7575	75 X 75	
SD-10075	100 X 75	
SD-15075	150 X 75	
SD-4080	40 X 80	
SD-6080	60 X 80	
SD-8080	80 X 80	
SD-80100	80 X 100	
SD-100100	100 X 100	
SD-150100	150 X 100	
SD-200100	200 X 100	
SD-200100J	200 X 100	
SD-300100	300 X 100	


▲ Other types of wiring duct can be customized.

0101 KSS NON-SLIP WIRING DUCT COVER

94V-0

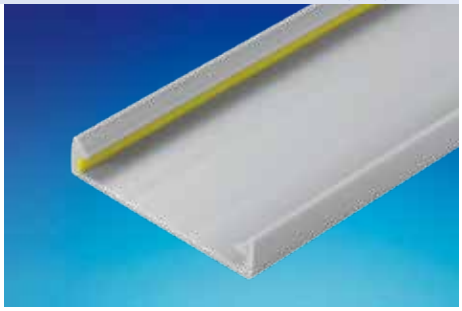

- Material: UL94V-0 and M1 flame rated, UL approved PVC with PE copolymer.
- Color: Grey.
- Feature: Neat and stable gluey layer inside duct cover tightens the base and cover more firmly. Cover won't slide easily and stays in place for vertical orientation. Installation will be convenient and safe.



Item No.						Length
DCQ-20L	DCQ-33L	DCQ-50L	DCQ-65L	DCQ-75L	DCQ-120L	2M
DCQ-25L	DCQ-40L	DCQ-55L	DCQ-70L	DCQ-80L	DCQ-125L	
DCQ-30L	DCQ-45L	DCQ-60L	DCQ-72L	DCQ-100L		

http://www.kss.com.tw E-mail:kss@mail.kss.com.tw TEL:886-2-2555-1929 FAX:886-2-2556-0052