MENNEKES
MY POWER CONNECTION

Connector
PowerTOP Plus

Part number: 3409



MENNEKES
Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1
57399 Kirchhundem
GERMANY

www.**MENNEKES**.org

Version May 24 2026 Subject to change without notice. No liability accepted for printing errors.

Product Description

- screw connection technology ErgoCONTACT
- enclosure with thread lock and safety slide
- X-CONTACT
- protection against kinking
- strain relief
- cable gland and sealing
- area for self-adhesive labels
- Due to different manufacturing processes, the item may be delivered with either an adhesive or a laser-engraved nameplate.

Technical Details

Connector PowerTOP Plus	3409
Product serie	PowerTOP Plus
Ampere	16A
Number of poles	5p
Clock position	6h
Nominal voltage AC	400V
Nominal frequency	50 - 60 Hz
Protection type IP	IP44
Contact carrier	standard
X-CONTACT	yes
Connection	screw terminals - ErgoCONTACT
Contact screw drive	PZ2, slot
Tightening torque connection terminal	0.9 Nm
Recommended wire end treatment for supply cable connection terminal	ferrule square gasproof crimped
Strip length jacket	50 mm
Strip length conductor PH + N	10 mm
Strip length conductor PE	10 mm
Pilot contact	without pilot contact
Conductor cross-section min.	1 mm^2
Conductor cross-section max.	2.5 mm^2
Cable kink protection	integrated in cable gland

Connector PowerTOP Plus	3409
Protective grommet	without protective grommet
Militärausführung	nein
Weight (net)	255 g
Packaging unit	10 pcs
Quantity per pallet	880 pcs
EAN / identification number	4015394296461

Permissible ambient conditions	Min.	Max.
Permissible ambient temperature	-25 °C	40 °C

Material properties	
Cover	PA6 squirrel grey [similar RAL 7000]
Front part	PA6 red [similar RAL 3013]
Hinged lid	PC red [similar RAL 3013]
Clamp basket	PA6 natural colour [no RAL colour code]
	TPE squirrel grey [similar RAL 7000]
Fastening	PA6 squirrel grey [similar RAL 7000]


Material resistance

The material resistance overview can be found on the website in the section “Knowledge” - “Product knowledge” - “Materials”.

Material and environmental properties	
RoHS 2011/65/EU incl. 2015/863/EU	✓
POP regulation (EU) 2019/1021	✓
Halogen-free	yes

Regulations and Standards	
Norm	DIN EN IEC 60309-2
Declaration of Conformity	CE
Test label	CB Zertifikat, VDE, CQC, EAC

Dimensional Drawing

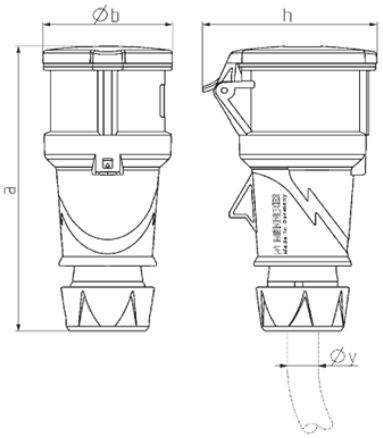

Drawing	Amp.	16			32		
3 MB 80	Poles	3	4	5	3	4	5
Dim. in mm	a	155	167	164	202	202	200
	b	55	68	69	78	78	80
	h	72	92	98	100	100	107
y min. from		7	8	8	10.5	10.5	13.5
to max. mm		–13	–15.5	–15.5	–18	–18	–20
Terminal for cond. cross		1	1	1	–2.5	–2.5	–2.5
section (mm^2) min.-max.		–2.5	–2.5	–2.5	–6	–6	–6