


0615 KSS 浪管固定頭 FLEXIBLE CONDUIT ADAPTOR

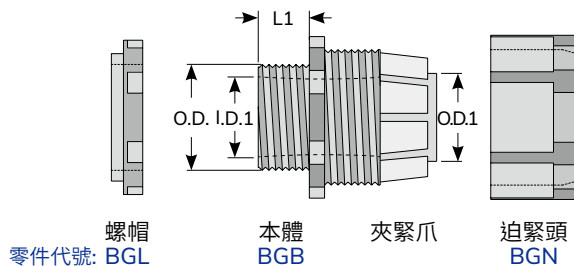

IP55防塵、防水測試合格

單位：mm

型 號 Item No.	螺紋規格 Thread	螺紋外徑 Thread O.D.	鐵板孔徑 Mounting Hole	適用浪管內徑 O.D.1	適用最大線徑 I.D.1	螺紋 長度 L1	適用浪管 Suitable Conduit	包裝 Packing
BG-10	M12X1.25	12.0	12+0.2	7.5	5.8	9.7	BG-10P	50pcs
BG-14	M16X1.5	18.0	18+0.2	10.5	9.0	10.0	BG-14P	
BG-16	M16X1.5	18.0	18+0.2	10.8	9.0	10.0	BG-16P	
BG-18	M16X1.5	16.0	16+0.2	13.3	10.8	9.7	BG-18P 3分 (3/8")	
BG-20	M20X1.5	21.0	21+0.2	14.7	12.9	10.0	BG-20P	
BG-22	M20X1.5	20.0	20+0.2	17.2	14.8	9.8	BG-22P 4分 (1/2")	
BG-25	M25X1.5	25.0	25+0.3	18.9	16.6	11.4	BG-25P	
BG-26	M25X1.5	25.0	25+0.3	19.8	17.6	11.4	BG-26P 6分 (3/4")	25pcs
BG-32	M32X1.5	33.0	33+0.3	24.3	22.3	12.0	BG-32P	
BG-34	M32X1.5	34.0	32+0.3	28.6	25.5	11.3	BG-34P 1吋 (1")	
BG-40	M40X1.5	39.5	39.5+0.3	31.6	29.0	11.3	BG-40P	10pcs
BG-42	M40X1.5	40.0	40+0.3	34.8	31.4	11.5	BG-42P 1吋2分 (1 1/4")	
BG-48		46.0	46+0.3	40.5	36.9	12.6	BG-48P 1吋半 (1 1/2")	
BG-50		46.0	46+0.3	39.5	36.9	12.6	BG-50P	

材質：UL合格之 NYLON 66 (灰色)，防火等級 94V-2。

用法：1.先將本體套入鐵板，再以螺帽固定之。

2.將浪管插入浪管爪中，再以迫緊頭作正向旋轉迫緊。

用途：配電盤，機械中電氣管固定、防水用。

※若分開訂購各零件時，請在型號後面加上各代號：螺帽 (L) 本體 (B) 迫緊頭 (N) 例：訂購BG-16螺帽，型號為BGL-16